



Above

The fixture emits soft comfortable downlight. The conical shape and the matte, white-painted inside help assure even distribution of the light. The opening at the top of the fixture provides decorative illumination of the arch above, and ensures that the fixture retains the full expression of its visual shape both when illuminated and when switched off.



Mads Odgård

The Danish designer Mads Odgård (1960 to present), is a leading figure in a new generation of international designers. He is a minimalist and a 'less is more' man, who would rather deduct than add. More than anything, he believes that excellent design must be logical and functional if it is to endure.



Set location:
Alpha Dominche



Product info

Information

Electrical: System Wattage: 10W or 22W LED Wattage: 9 W or 20 W Delivered lumens: 351 - 1,678 Efficacy: 35.1 lm/W - 76.3 lm/W Certifications: cULus, Dry Location Protection class IP20 Controllability: Phase dimming or 0-10V dimming. Color Rendering: Ra≥90 for LED variants. Performance dependent upon screw-base lamp used in socketed variants.

Mounting

Canopy: Black. Cord type: 3-conductor, 18 AWG cloth-covered power cord. Cord length: 12 feet.

Finish

White, matte or black, matte, wet painted.

Materials

Shade: Spun aluminum.

Sizes and weight

Width x Height x Length (in.) | 15.7 x 18.9 x 15.7 Max 5.4 lbs | 6.9 x 8.3 x 6.9 Max 2.6 lbs | 9.8 x 11.8 x 9.8 Max 3.3 lbs | 21.7 x 26 x 21.7 Max 8.3 lbs

Compliance

cULus, Dry location.

Specification notes

a. 6.9 IN size available only in 10W/A-15/medium. b. 9.8 IN size available only in 15W/A-19/medium. c. 15.7 IN size available in 22W/A-21/medium and 35W LED. d. 21.7 IN size available in 22W/A-21/medium or 35W LED. e. Incandescent variants available only in 120V. f. LED variants available only in 120-277V with 0-10V dimming.

Light source

1x22W A-21/medium

Information

Electrical:
System Wattage: 10W or 22W
LED Wattage: 9 W or 20 W
Delivered lumens: 351 - 1,678
Efficacy: 35.1 lm/W - 76.3 lm/W
Certifications:
cULus, Dry Location
Protection class IP20
Controllability: Phase dimming or 0-10V dimming.
Color Rendering: Ra≥90 for LED variants.
Performance dependent upon screw-base lamp used in socketed variants.



Product variants

| Dimension | Color | Light source | Lumen | Voltage frequency | Lighting control |
|-----------|---------|------------------------|-------|-------------------|----------------------------|
| 15.7 IN | ● Black | 1x10W A-15/medium | - | 120-277V/60HZ | - |
| 21.7 IN | ○ White | 1x15W A-19/medium | 2413 | 120V | Dim 0-10v |
| 6.9 IN | | 1x22W A-21/medium | 2604 | | Phase dimming (mains dimm) |
| 9.8 IN | | 44W LED/3000-1800K D2W | 2929 | | |
| | | 44W LED/3000K | 3160 | | |

Product description

Above pendant is simplistic in form. It is a conical shape that is rounded at the top with 2 small sections cut away to reveal a curved arched top. The cutouts allow just enough light to illuminate the underside of the arch, providing some up-light. When mounted at the proper height, the fixture provides glare-free downward light. Beautiful as a single light or in a series. Exterior finish is either black or white, and the interior is matte white. The fixture is available in 4 different sizes: 6.9", 9.8", 15.9", 21.7" diameters (heights: 8.3", 11.8", 18.9", 26.0" respectively).

Mounting

Mounts onto a 4 inch octagonal outlet box. Canopy: Black flat cone profile, 5.3 IN diameter x 1 IN tall. Cord type: 3-conductor, 18 AWG black fabric-covered power cord. Cord length: 12 feet.

Light description

The interior light is reflected downward with the assistance of its white matte interior finish. It is glare-free when hung at a normal height. The medium base socket allows the user flexibility to select the lamp color temperature, or even a wirelessly controlled lamp. The 15.7" and 21.7" sizes are available with an add-on bottom anti-glare diffuser.

Design

Mads Odgård

Material

Shade is spun aluminum, 0.08 IN thick. Canopy is spun aluminum, 0.03 IN thick. Socket: Porcelain, medium base for A-21 size lamps. Standard finish are matte surface powder coat with minimum 2 mils thickness in black or white.

Weight

Min: 2.579 lbs Max: 8.259 lbs

Dimensions

15.7 IN, 21.7 IN, 6.9 IN, 9.8 IN

Other functions

Longer cord lengths. Alternative finishes. Bottom anti-glare diffusers on certain sizes.

Finish


Black, White

Voltage


120-277V/60HZ, 120V

Light distribution diagrams


Cartesian

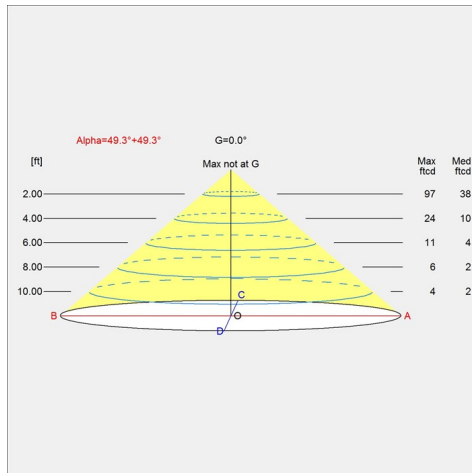

Isolux

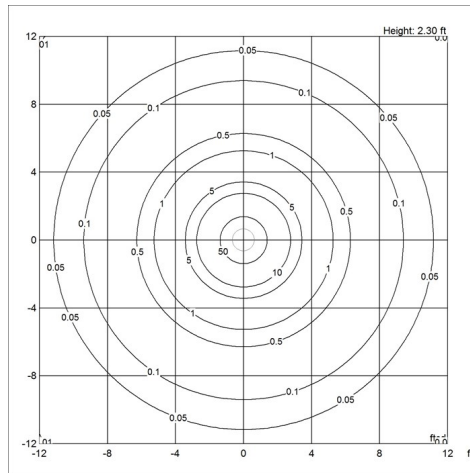

Polar

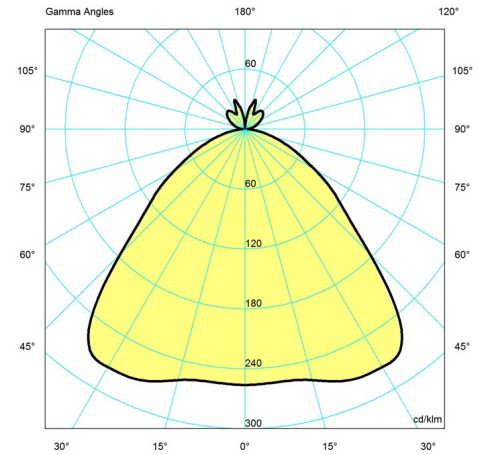

Spare parts & accessories

Product

ABOVE 250 PEND ANTI-GLARE SHADE MAT
ABOVE 400/550 PEND ANTI-GLARE SHADE MAT

Variant number

5741910483
5741910496

